

DC OUTPUT (max 1200W): 0 -100 Amps
0 - 1200 Volts



U I P OVP OT USB RS232 LAN IEEE CAN Profibus

Presentation :

- Specifications:
 - o Height : 2U
 - o 19 inch rack or cabinet
 - o Depth: 275 mm
- Minimum volume and weight for maximum capacity
- Switched mode technology
- Voltage and current controlled by PWM (Pulse Width Modulation)
- On request : programmable voltage/current: 0-10 V or 4/20mA, isolated to 1500 Vrms
- Over-voltage protection (OVP) / Over-temperature protection (OTP)


Power : MX 1200W	
Weight : 7 Kg	
Volts	Amps
0 - 12	0 - 100
0 - 24	0 - 50
0 - 40	0 - 30
0 - 60	0 - 20
0 - 80	0 - 15
0 - 120	0 - 10
0 - 150	0 - 8
0 - 200	0 - 6
0 - 300	0 - 4
0 - 600	0 - 2
0 - 1000	0 - 1,2
0 - 1200	0 - 1



Descriptions :

- . Polycarbonate front panel
- . Two-colour On/Off LED: Off = red / On = green
- . Voltage and current adjustable using two 10-turn potentiometers (U-adj and I-adj)
- . Two modes of operation: constant current (CC) and constant voltage (CV) indicated by two LEDs
- . 2000-point digital displays (VOLTAGE/CURRENT)
- . Power output activated by pressing 'OUT'
- . Manual Voltage/Current preset (U/I set push button) shown on displays
- . Power input by standardised pluggable connector
- . Power outputs on insulated terminals or screw terminal block

Power : MX 1200W	
Weight : 7 Kg	
AC Input	
Voltage	230 Vac Mono + 10% -15%
Frequency	47 / 63 Hz
Power factor	> 0,95
DC Output	
Power	1200W
Voltage	0 to 1200V
Current	0 to 100A
Mode of operation	CC-CV
Residual ripple	< 0,5% of the normal gauge
Accuracy (Voltage and Current)	< 0,2% of the normal gauge
Stability	< 0,2% of the normal gauge
Linearity	< 0,2% of the normal gauge
Distorsion	< 0,5%
Environment	
Temperature	0 to +40°C (55°C derating)
Relative Humidity	85% without condensation
Cooling	Controlled air cooling
Dielectric Rigidity	1500 Vrms

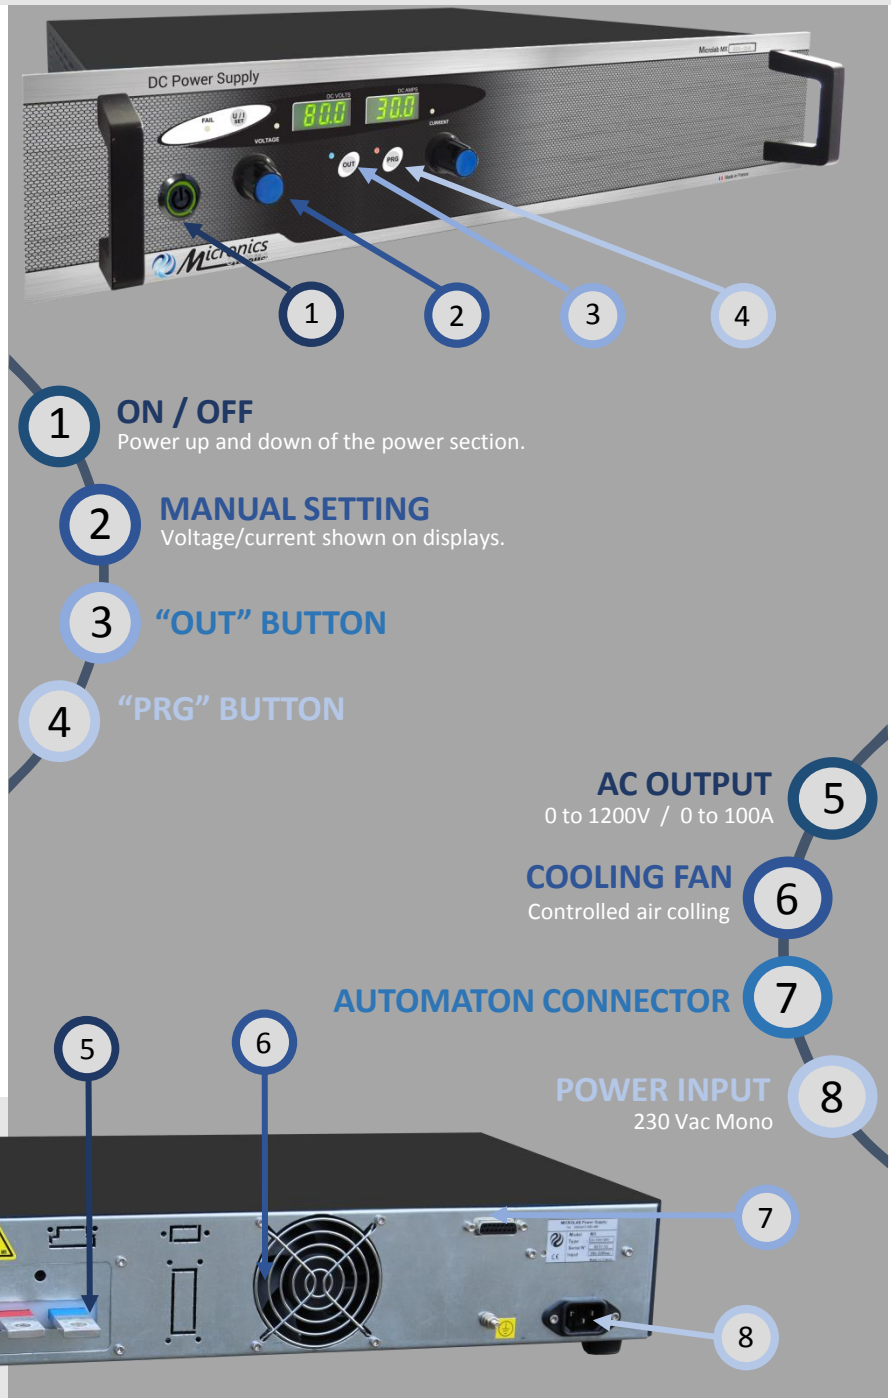

- 1 ON / OFF**
Power up and down of the power section.
- 2 MANUAL SETTING**
Voltage/current shown on displays.
- 3 "OUT" BUTTON**
- 4 "PRG" BUTTON**

- 5 AC OUTPUT**
0 to 1200V / 0 to 100A
- 6 COOLING FAN**
Controlled air colling
- 7 AUTOMATON CONNECTOR**
- 8 POWER INPUT**
230 Vac Mono

Customisation :

Digital control:

- 2-wire RS 485 / Ethernet / Wifi
- Profibus DP
- Standard : Schneider/ Siemens/Wago/Phoenix...

Analog control:

- U and I Inputs/Outputs
- 0-10V or 4-20 mA isolated 1500 Vrms

15-pin D-Sub connector for remote programming

Non-binding document, may be amended without notice.
 Ref: 140217 / MX 1200W

